



THE THERMO MIXER

ALL-PURPOSE BATCH PROCESSORS

FELDMEIER



Agitation

for mixing, blending, beating, whipping, suspending solids, and formulating.

Thorough mixing and heat transfer are assured with this multi-function unit. A large diameter axialflow turbine in the center rotates with an outer scraper agitator. Each mixer has its own independent drive.

Zone Heating


for control of heating surface area

Heat zone on the bottom is always open; one on the side can be opened or shut off as required. Lets you heat while filling the processor; also lets you heat small batches.

Enclosed System

for most accurate temperature control

Heating or cooling agent is pumped under pressure through stainless steel heat transfer surfaces welded to the lining on both sidewalls and bottom. Medium can be hot water, steam, city or well water, or refrigerated water. Highly recommended for low temperature cooling where refrigerated water is available.

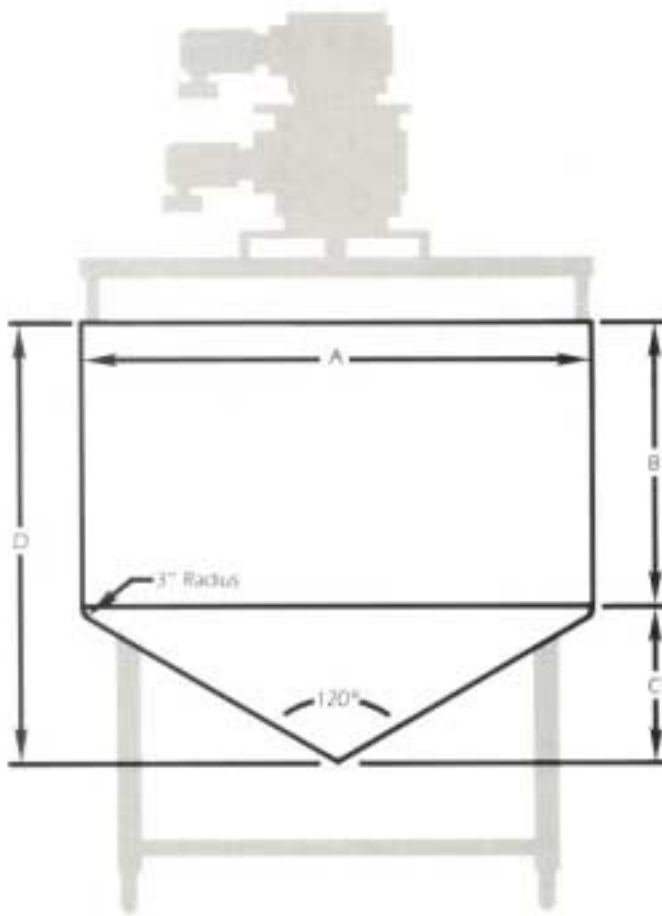

THERMOMIXER SPECIFICATIONS

Model	Dimensions (Inches)					Heat Transfer	
	A	B	C	D	O.A.H.	Sides	Cone
						Sq. Ft.	Sq. Ft.
300	57"	27 ¹ / ₂ "	18 ¹ / ₂ "	46 ¹ / ₂ "	112"	19.8	12.9
400	57"	37 ¹ / ₂ "	18 ¹ / ₂ "	56"	122"	34.5	12.9
500	66"	33 ¹ / ₂ "	21 ¹ / ₂ "	55 ¹ / ₂ "	122"	34.5	18.5
600	66"	41 ¹ / ₂ "	21 ¹ / ₂ "	62 ¹ / ₂ "	128"	46	18.5
800	72"	46"	23"	69"	135"	50.2	22.9
1000	72"	58 ¹ / ₂ "	23"	81 ¹ / ₂ "	147"	75	22.9

Other Sizes Available



For Additional Information Contact:

FELDMEIER
EQUIPMENT, INC.

Executive Offices:

P.O. Box 474 • Syracuse, NY 13211-0474
Tel. (315)454-8808 • Fax (315)454-3701
e-mail: sstanks@feldmeier.com

Manufacturing Facilities:

6800 Town Line Rd. • Syracuse, NY 13211
575 East, Mill Street • Little Falls, NY 13365
Tel. (315)823-2000 • Fax (315)823-5012

2053 Mitchell Young Rd. • Montgomery, AL 36108

Because of Feldmeier Equipment's constant program of improvement, specifications are subject to change without notice.
Printed in U.S.A.